


SOLID JOHN

EAVES SCREW

Meet the Solid John roof edge screw. It's made to tightly secure the eave of your flat roof to our super durable warranty concrete plywood.

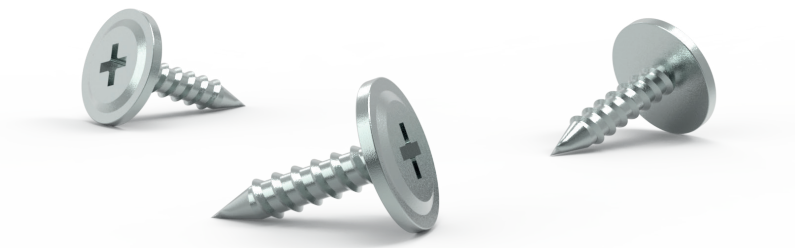

EXCEPTIONAL PERFORMANCE

- Flat head to avoid damaging your roof waterproofing
- Ideal length for adhesion to boards 15 mm thick
- Stainless, so no hassle with discoloration or corrosion.
- Perfectly suitable for perforating both zinc and aluminum.

APPLICATIONS


With the Solid John roof edge screw you easily attach roof edge profiles to our 15mm warranty concrete plywood. It works for both zinc and aluminum eaves and is suitable for both wood and steel substrates.

PACKAGING

500 pieces per box

TECHNICAL DATA - 16MM VERSION


Material..... galvanized steel
Thickness.....4.2mm
Length(L).....16mm
Type of head.....PH(Phillips head)
Diameter(D).....head12mm
Self-tapping.....yes



EAN 8720299794344 (16mm)

TECHNISCHE GEGEVENS - 25MM VERSIE

Material..... galvanized steel
Thickness.....4.2mm
Length(L).....15mm
Type of head.....PH(Phillips head)
Diameter(D).....head12mm
Self-tapping.....yes

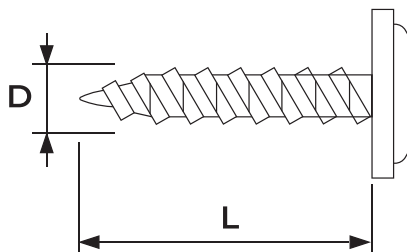

EAN 8720299794351 (25mm)



SOLID JOHN

Slabbaardstraat-Zuid 51
B-8870 Izegem

Tel. + 32 51 56 60 56
E-mail: info@solidjohn.be

