

SOLID JOHN FASTENER

Meet the Solid John Fastener. It is designed for use with Solid John ROOF 15 & 21 mm on the roof edges of flat roofs.



EXCEPTIONALLY HIGH-PERFORMANCE

- Flat head to prevent perforation of the roof membrane.
- 60 mm for standard applications
120 mm for thicker structures (e.g., sandwich panels, etc.)
- Steel with a Ruspert coating

APPLICATIONS


With the Solid John Fastener, you can easily attach our warranty-plywood to the aerated concrete in the roof edge.

PACKAGING

500 pieces per box (60 mm) | 300 pieces per box (120 mm)

TECHNICAL SPECIFICATIONS - 60MM VERSION


Material.....steel with a Ruspert coating
Length(L).....60mm
Head type.....Torx 25
Diameter(D)8mm
Self-tapping..... yes

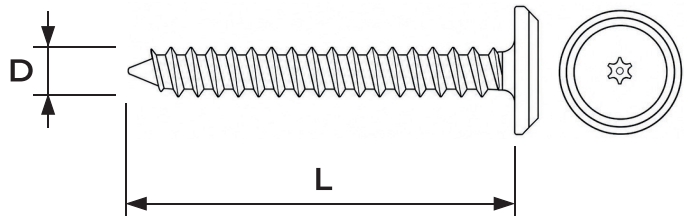

EAN 8720892950109 (60mm)

TECHNICAL SPECIFICATIONS - 120MM VERSION

Material.....steel with a Ruspert coating
Length(L).....120mm
Head type.....Torx 25
Diameter(D)8mm
Self-tapping..... yes

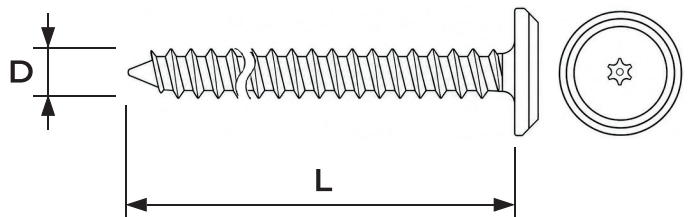

EAN 8720892950116 (120mm)



SOLID JOHN

Slabbaardstraat-Zuid 51
B-8870 Izegem

Tel. + 32 51 56 60 56
E-mail: info@solidjohn.be

